


IJM 250 / 2 - N

Specification



Power Supply (V/Ph/Hz)	230~240/1/50	230~240/1/60
Flow Rate (m3/h)	1105	1130
Outlet Velocity (m/s)	17.4	17.7
Fan Speed (rpm)	2420	2400
Power (W)	192	257
Max Amp	0.72	1.00
Sound level dB(A)	52 @1m (Free Field, 45°)	52 @1m (Free Field,45°)


Dimension

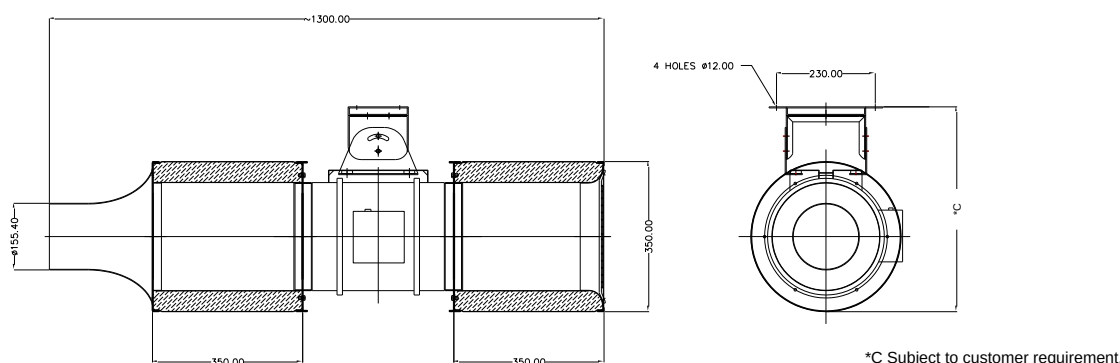

Velocity Profile (Single Fan)

Distance (m)	1	2	3	4	5	6	7	8	9	10	11	12	13
Flow width (m)	0.43	0.85	1.28	1.70	2.13	2.55	2.98	3.40	3.83	4.25	4.68	5.10	5.53
Velocity (m/s)	11.32	6.94	4.83	3.71	3.01	2.53	2.18	1.92	1.71	1.55	1.41	1.30	1.20

Distance (m)	14	15	16	17	18	19	20	21	22	23	24	25	26
Flow width (m)	5.95	6.38	6.80	7.23	7.65	8.08	8.50	8.93	9.35	9.78	10.20	10.63	11.05
Velocity (m/s)	1.11	1.04	0.98	0.92	0.87	0.83	0.78	0.75	0.71	0.68	0.66	0.63	0.61

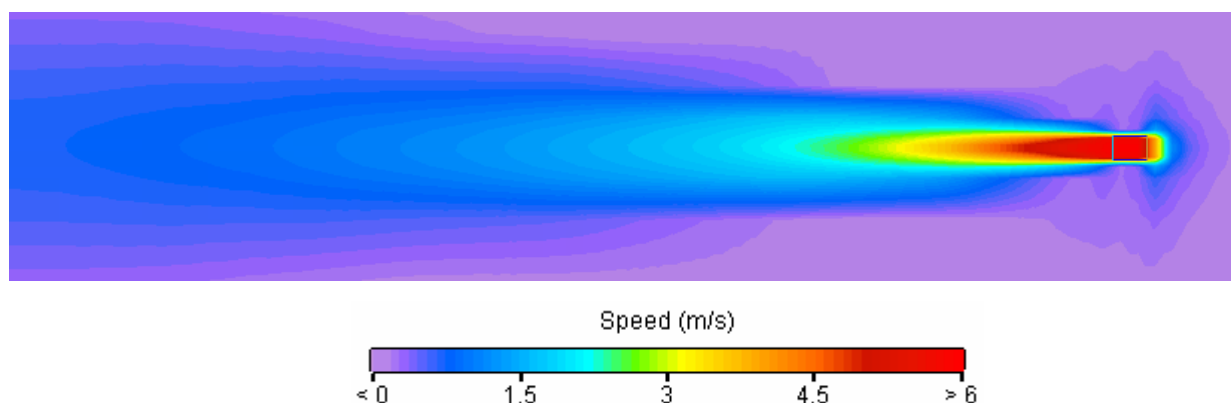


IJM 250x2

Specification



Fan Flow Rate (m3/h)	2540	Power (W)	380
Fan Speed (rpm)	2420	Sound Level dB(A)	57 @3m (Free Field)
Outlet Diameter (mm)	248	Power Supply (V/Ph/Hz)	230~240/1/50
Outlet Velocity (m/s)	7.6		



Dimension

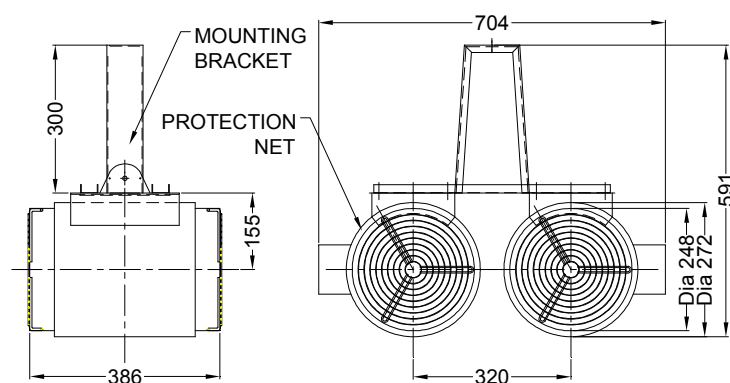

Velocity Profile (For single fan)

Distance (m)	1	2	3	4	5	6	7	8	9	10	11	12	13
Velocity (m/s)	6.32	4.79	3.42	2.65	2.17	1.83	1.59	1.40	1.25	1.13	1.04	0.95	0.88

Distance (m)	14	15	16	17	18	19	20	21	22	23	24	25	26
Velocity (m/s)	0.82	0.77	0.72	0.68	0.64	0.61	0.58	0.55	0.53	0.51	0.49	0.47	0.45

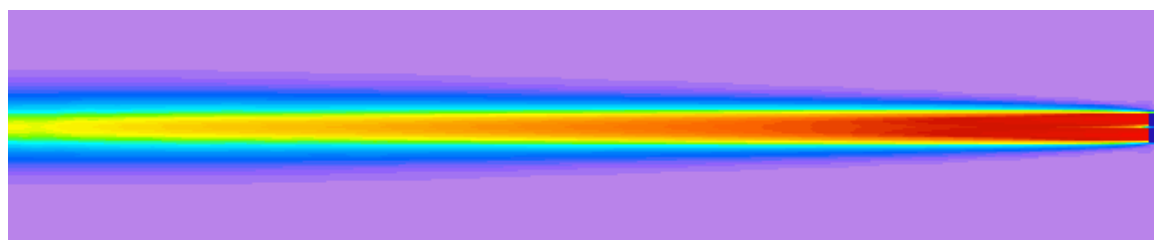


IJM 315 - N

Specification



Power Supply (V/Ph/Hz)	230~240/1/50	230~240/1/60
Flow Rate (m3/h)	1450	1530
Outlet Velocity (m/s)	16.8	17.7
Fan Speed (rpm)	2500	2650
Power (W)	260	352
Max Amp (A)	1.14	1.54
Sound level dB(A)	57 @1m (Free Field, 45°)	57 @1m (Free Field, 45°)


Dimension

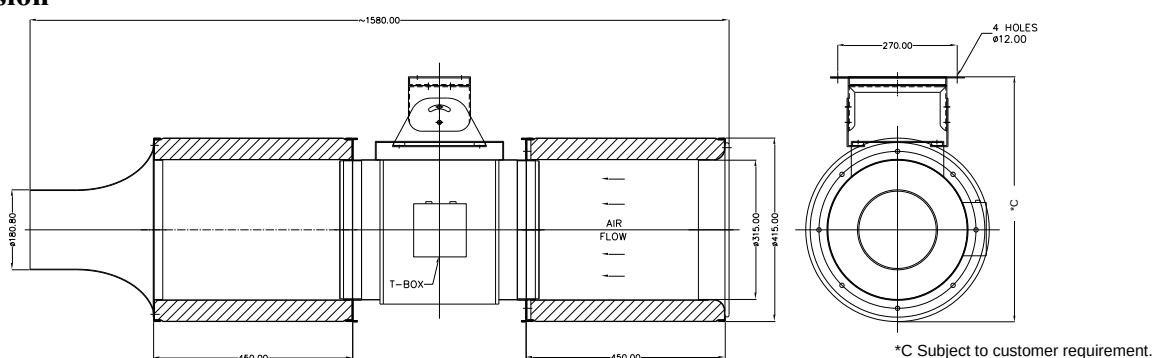

Velocity Profile (Single Fan)

Distance (m)	1	2	3	4	5	6	7	8	9	10	11	12	13
Flow width (m)	0.43	0.85	1.28	1.70	2.13	2.55	2.98	3.40	3.83	4.25	4.68	5.10	5.53
Velocity (m/s)	12.16	7.93	5.55	4.27	3.47	2.92	2.52	2.22	1.98	1.79	1.63	1.50	1.39

Distance (m)	14	15	16	17	18	19	20	21	22	23	24	25	26
Flow width (m)	5.95	6.38	6.80	7.23	7.65	8.08	8.50	8.93	9.35	9.78	10.20	10.63	11.05
Velocity (m/s)	1.29	1.21	1.13	1.07	1.01	0.96	0.91	0.87	0.83	0.79	0.76	0.73	0.70

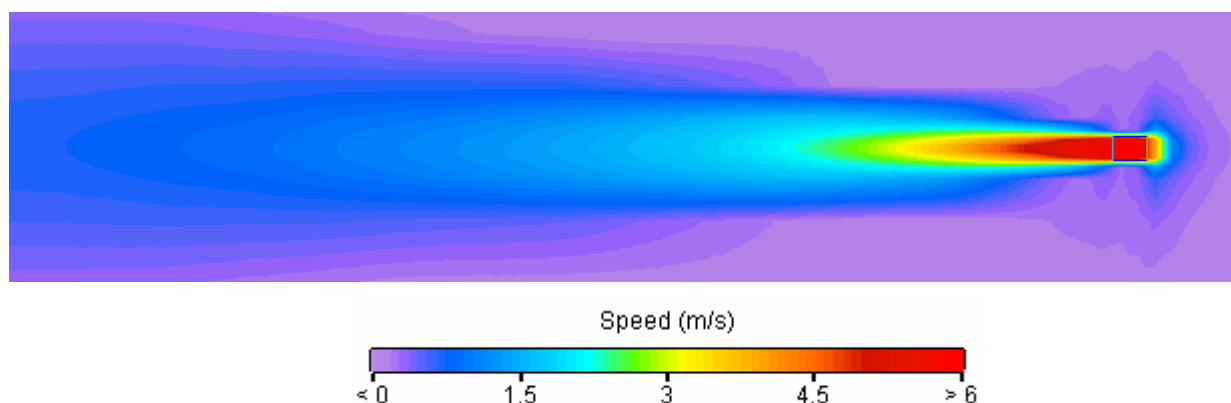


Specification



Power Supply (V/Ph/Hz)	230~240/1/50	230~240/1/60
Flow Rate (m3/h)	2940	3240
Outlet Velocity (m/s)	16.6	18.3
Fan Speed (rpm)	1400	1500
Power (W)	345	483
Max Amp	1.55	2.30
Sound level dB(A)	50 @1m (Free Field,45°)	50 @1m (Free Field,45°)

Dimension

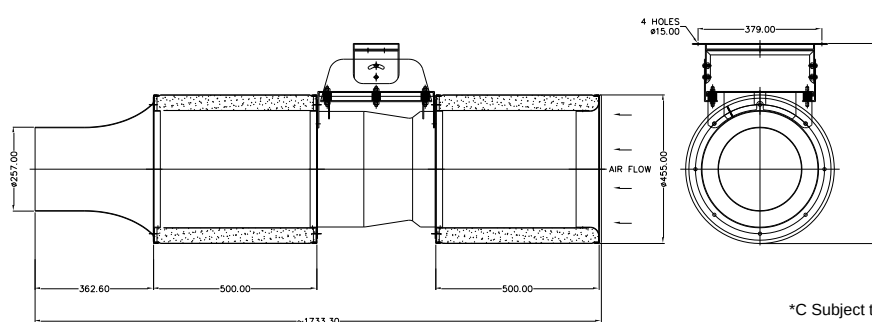

*C Subject to customer requirement.

Velocity Profile

Distance (m)	1	2	3	4	5	6	7	8	9	10	11	12	13
Flow width (m)	0.43	0.85	1.28	1.70	2.13	2.55	2.98	3.40	3.83	4.25	4.68	5.10	5.53
Velocity (m/s)	14.64	10.61	7.56	5.87	4.80	4.06	3.51	3.10	2.77	2.51	2.29	2.11	1.95

Distance (m)	14	15	16	17	18	19	20	21	22	23	24	25	26
Flow width (m)	5.95	6.38	6.80	7.23	7.65	8.08	8.50	8.93	9.35	9.78	10.20	10.63	11.05
Velocity (m/s)	1.81	1.70	1.59	1.50	1.42	1.35	1.28	1.22	1.17	1.12	1.07	1.03	0.99

